


CARACTERISTICAS / FEATURES

Material	hormigón petra 1
Acabado	decapado e hidrofugado
Dimensiones	l. 90, a. 90, h. 45 cm.
Color	ver carta de colores
Fijación	simplemente apoyado o medinate varillas metálicas
Peso	580 Kg
Palet	200 x 100 x 65cm
Peso palet	610 Kg


Material	precast concrete petra 1
Finish	scaled and waterproofed
Dimensions	l. 90, w. 90, h. 45 cm
Colour	see colour catalogue
Fixing	resting on the ground or anchored with metal rod
Weight	580Kg
Pallet	200 x 100 x 65 cm
Weight palette	610 Kg

dineñador / design: Roger Albero

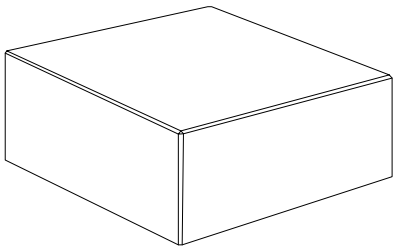


TETRIS Q90


GEOMETRIA / GEOMETRY

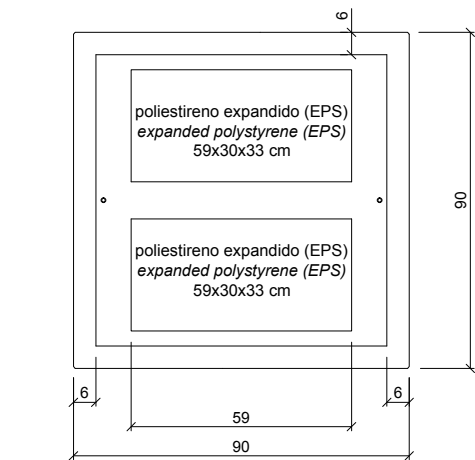


VISTA INFERIOR / BOTTOM VIEW

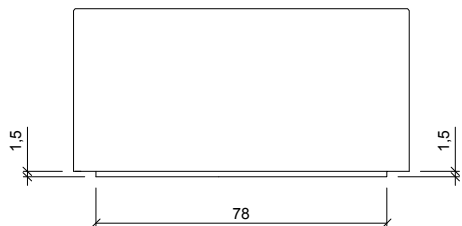

ALZADO / FRONT VIEW

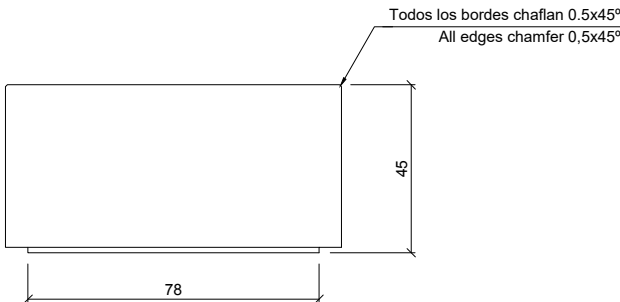


PERFIL / RIGHT SIDE




MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION


- 1 enroscar la varilla / thread the rod
elevación / hoisting
P= 580 Kg

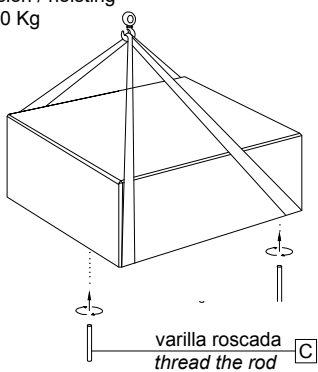


- 2 perforar 2 agujeros / drill 2 holes




- 3 verter resina epoxy / pour resin epoxy



- 4 insertar la varilla en el agujero
insert metal rod in hole



SISTEMA DE FIJACIÓN / ANCHORAGE SYSTEM

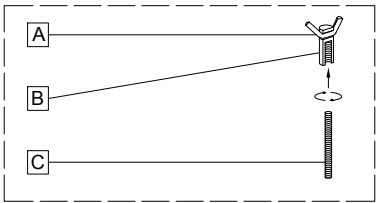


- A barra corrugada / corrugated rod
B casquillo roscado / thread sleeve
C varilla roscada / thread the rod

ESPECIFICACIONES / SPECIFICATIONS




SECCIÓN 1 / SECTION 1

Poliestireno expandido (EPS)
Expanded polystyrene (EPS)

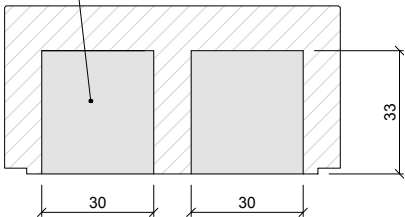

SECCIÓN 2 / SECTION 2

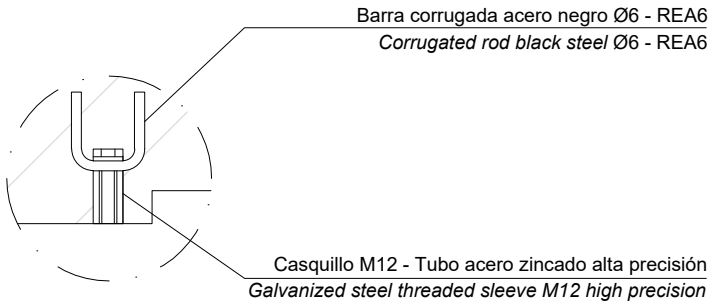

DETALLE B / DETAIL B

Tàrrrega, Lleida. - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com

magourban

