


CARACTERISTICAS / FEATURES


Material	hormigón petra 1	Material	concrete petra 1
Acabado	decapado e hidrofugado	Finish	scaled and waterproofed
Dimensiones	l. 279, a. 101, h. 46 cm.	Dimensions	l. 279, w. 101, h. 46 cm
Color	ver carta de colores	Colour	see colour catalogue
Fijación	simplemente apoyado o mediante varillas metálicas	Fixing	resting on the ground or anchored with metal rod
Peso	720 Kg	Weight	720 Kg
Bulto	300 x 110 x 60 cm	Package	300 x 110 x 60 cm
Peso bulto	750 Kg	Weight package	750 Kg

dineñador / design: Ton Riera

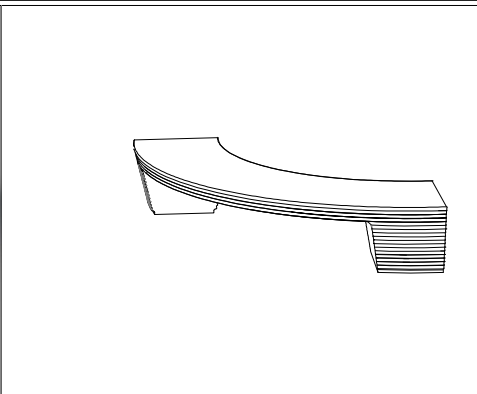

TIPPY GAP R136

GEOMETRIA / GEOMETRY

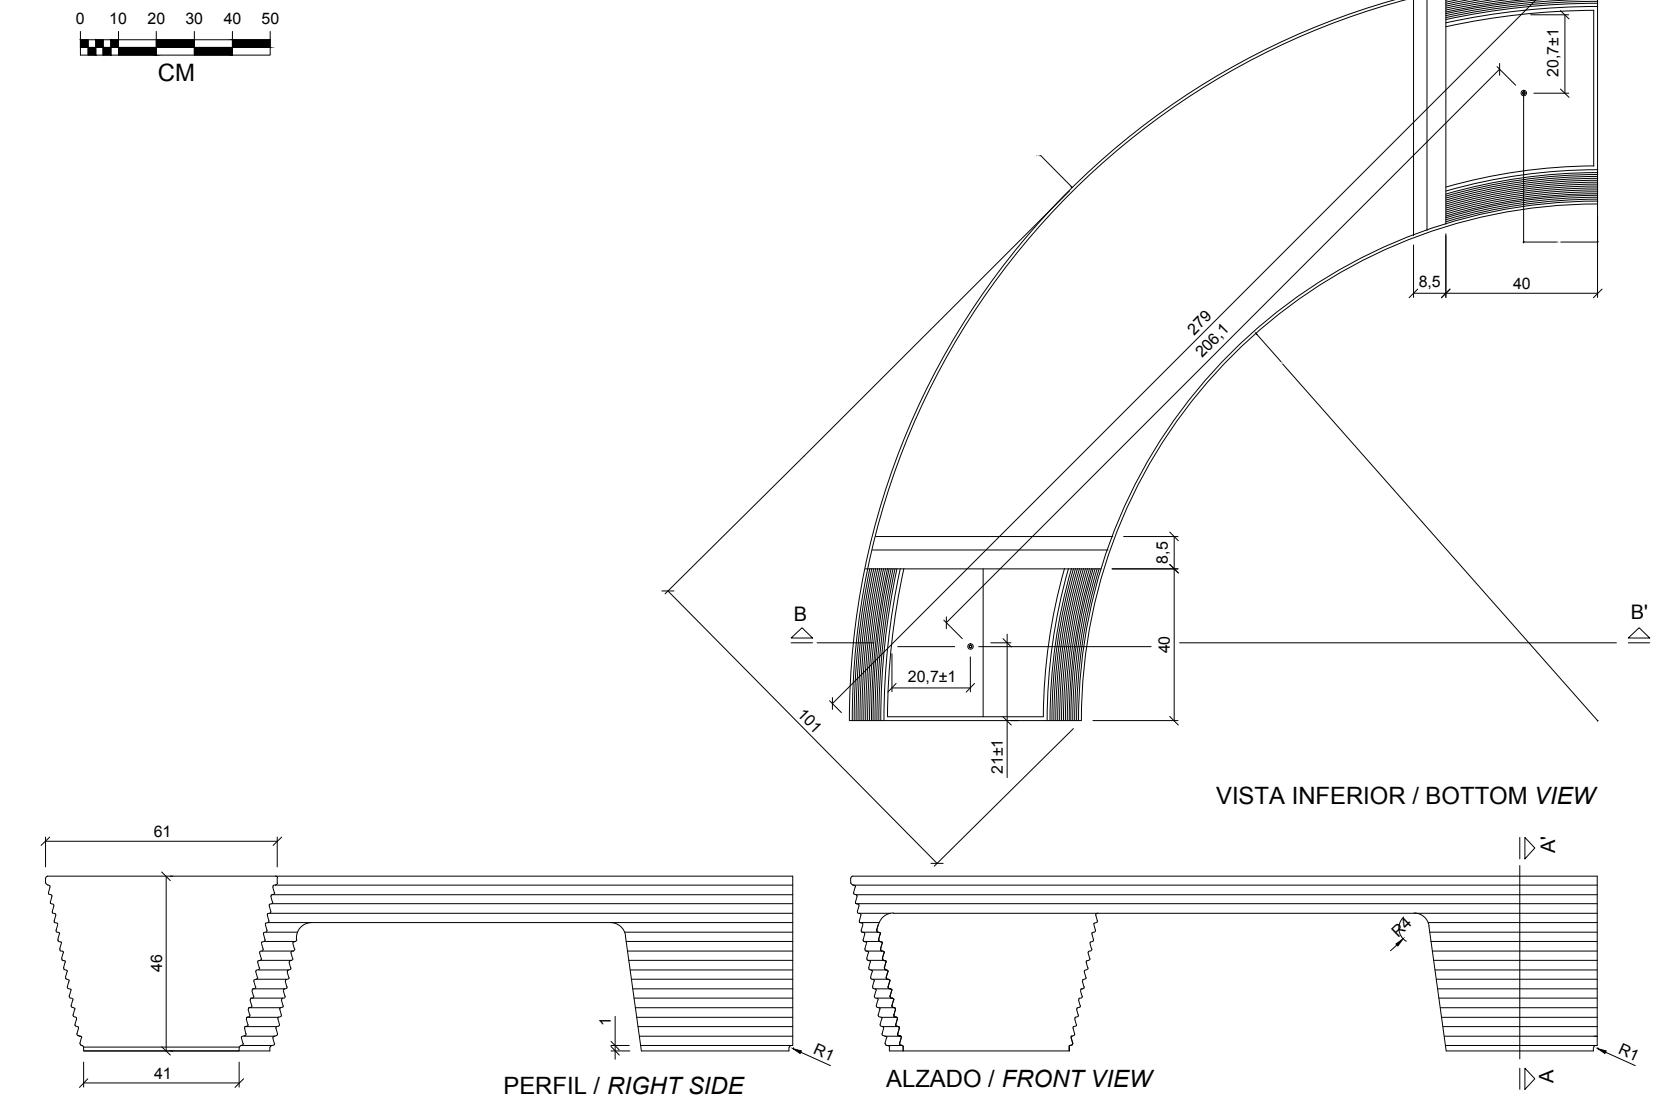

MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION

1 enroscar la varilla / thread the rod

elevación / hoisting
P= 720Kg

varilla roscada
thread the rod

2 perforar 2 agujeros Ø24 a distancia 206 cm
drill 2 holes Ø24 each at a distance ± 206 cm

3 verter resina epoxy / pour resin epoxy



4 insertar la varilla en el agujero
insert metal rod in hole

SISTEMA DE FIJACIÓN / ANCHORAGE SYSTEM

A barra corrugada / corrugated rod
B casquillo roscado / thread sleeve
C varilla roscada / thread the rod

ATENCIÓN!!!! no usar pala elevadora para la manipulación
ATTENTION!!! shouldn't use Forklift for handling

ESPECIFICACIONES / SPECIFICATIONS

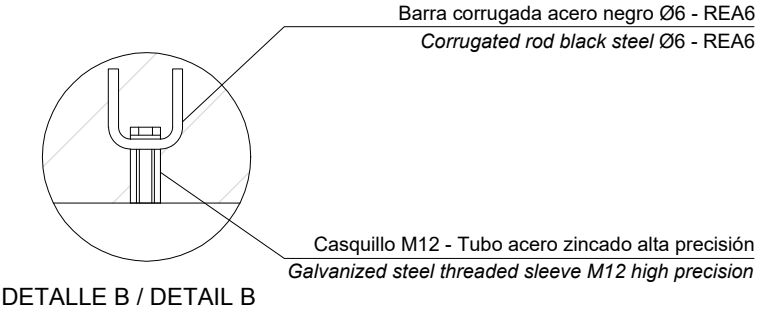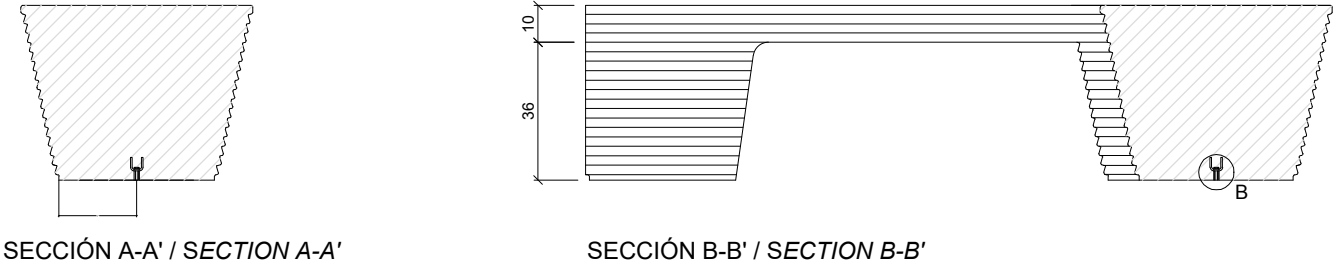

Tàrraga, Lleida - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com

magourban