

**CARACTERÍSTICAS / FEATURES**



**Material** hormigón petra 1  
**Acabado** decapado e hidrofugado  
**Dimensiones** l. 222, a. 59.3, h. 49.6 cm.  
**Color** ver carta de colores  
**Fijación** simplemente apoyado o mediante varillas metálicas  
**Peso** 530 Kg.  
**Palet** 230 x 60 x 65 cm  
**Peso palet** 585 Kg

**Material** concrete petra 1  
**Finish** scaled and waterproofed  
**Dimensions** l. 222, w. 59.3, h. 49.6 cm  
**Colour** see colour catalogue  
**Fixing** resting on the ground or anchored with metal rod  
**Weight** 530 Kg  
**Pallet** 230 x 60 x 65 cm  
**Weight pallet** 585 Kg


diseñador / design: EMBT, Benedetta Tagliabue



**GEOMETRIA / GEOMETRY**

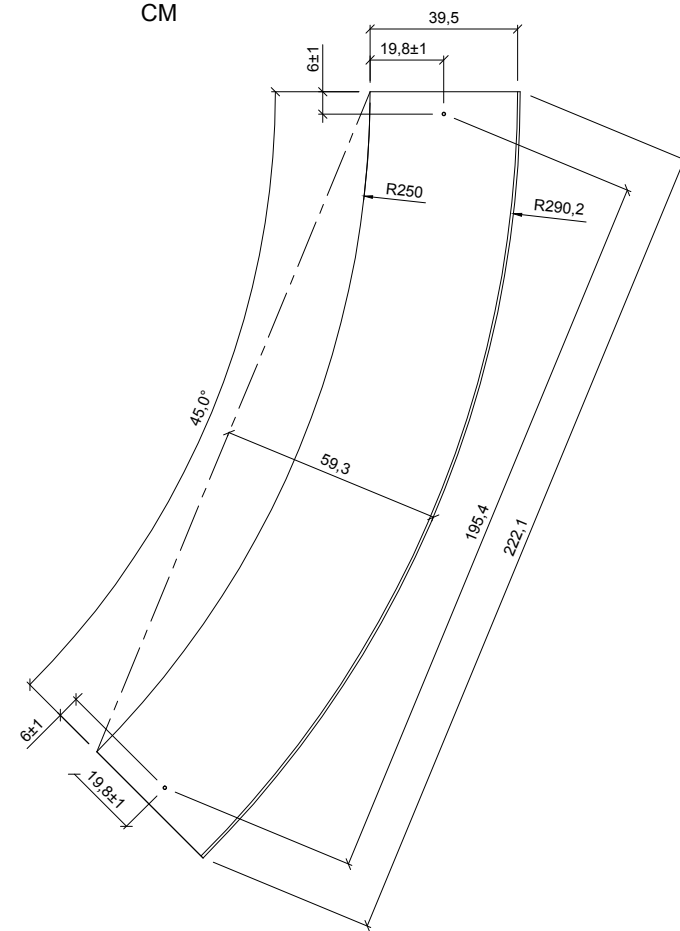


VISTA INFERIOR / BOTTOM VIEW

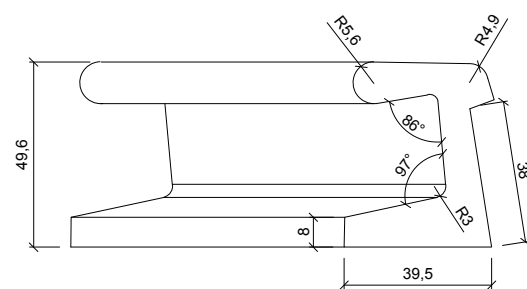


ALZADO / FRONT VIEW


**ESPECIFICACIONES / SPECIFICATIONS**




SECCIÓN 1 / SECTION 1



SECCIÓN 2/ SECTION 2

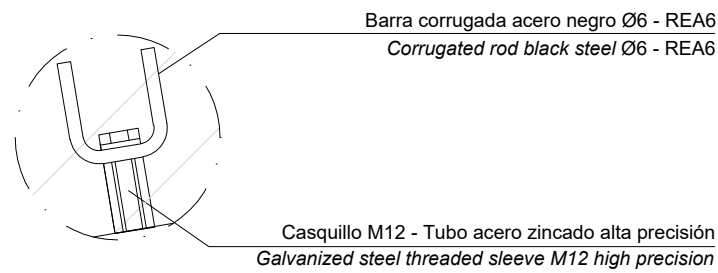


DETALLE B / DETAIL B  
 [ELEVACIÓN / HOISTING]

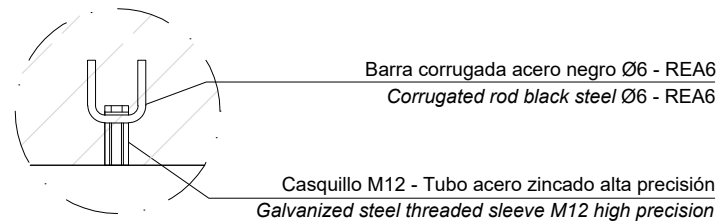


DETALLE C / DETAIL C  
 [ANCLAJE / ANCHORAGE]

**MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION**

- 1 enroskar cáncamo elevar y enroskar la varilla  
 thread the eyebolt, lift and threaded the rod

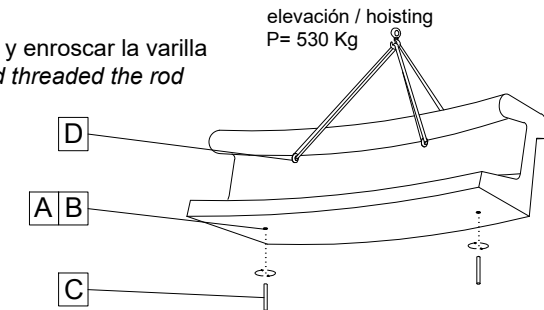


SISTEMA DE ELEVACIÓN / ANCHORAGE SYSTEM

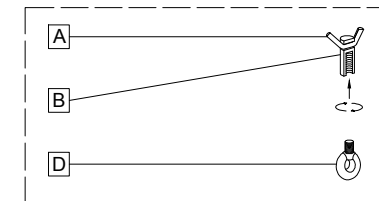

- A barra corrugada / corrugated rod  
 B casquillo roscado / thread sleeve  
 D cáncamo / eyebolt

SISTEMA DE FIJACIÓN / LIFTING SYSTEM

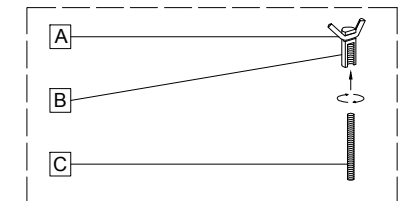

- A barra corrugada / corrugated rod  
 B casquillo roscado / thread sleeve  
 C varilla roscada / thread the rod

- 2 perforar 2 agujeros a distancia ± 195,4cm  
 drill 2 holes each at a distance ± 195,4cm
- 3 verter resina epoxy / pour resin epoxy



- 4 insertar la varilla en el agujero  
 insert metal rod in hole

