



CARACTERÍSTICAS / FEATURES



Material hormigón Petra 1
Acabado decapado e hidrofugado
Dimensiones l. 190, a. 190, h. 60 cm
Color ver carta de colores
Fijación apoyado por su propio peso o mediante resina epoxi
Peso 1550 Kg / 1100 L
Palet 200 x 200 cm


Material precast concrete Petra 1
Finish etched and waterproofed
Dimensions l. 190, w. 190, h. 60 cm
Colour see colour catalogue
Fixing resting on the ground or with epoxy resin
Weight 1550 Kg / 1100 L
Pallet 200 x 200 cm

diseñador / design: Ton Riera

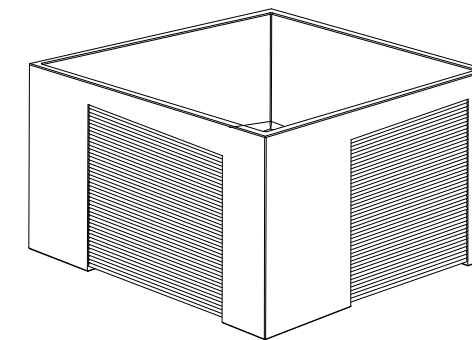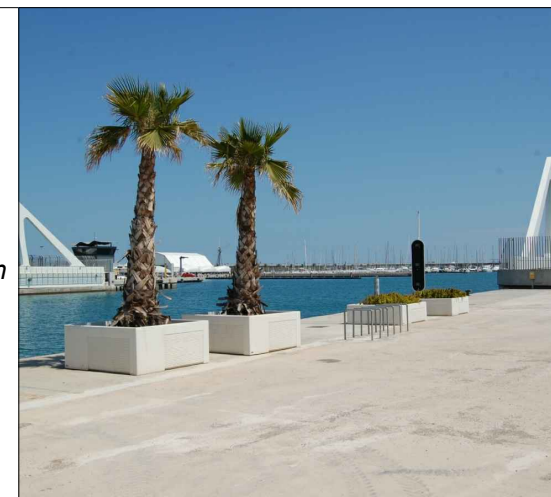


TANIT L-60


GEOMETRIA / GEOMETRY

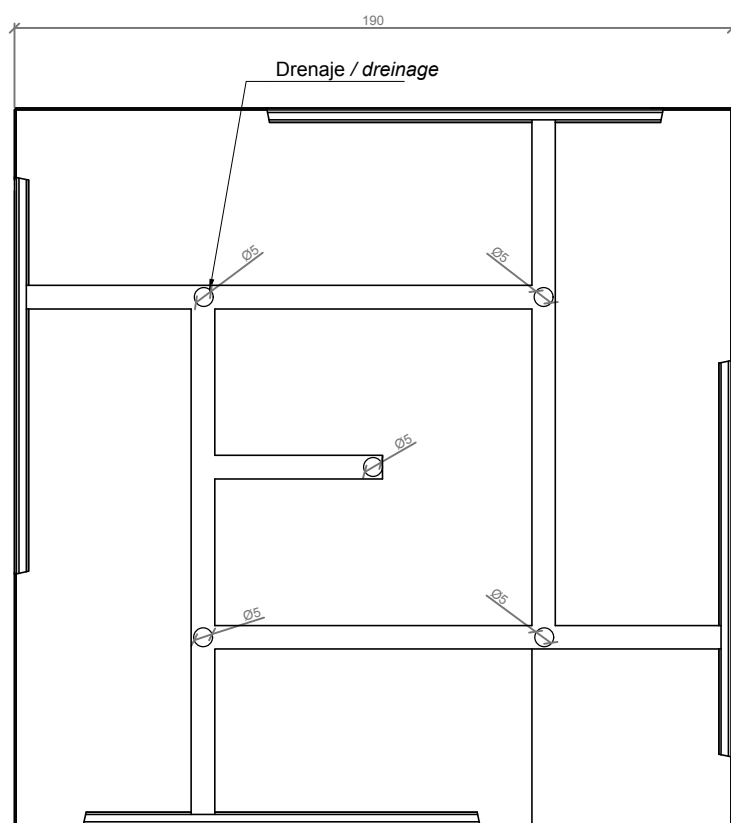

VISTA INFERIOR / BOTTOM VIEW

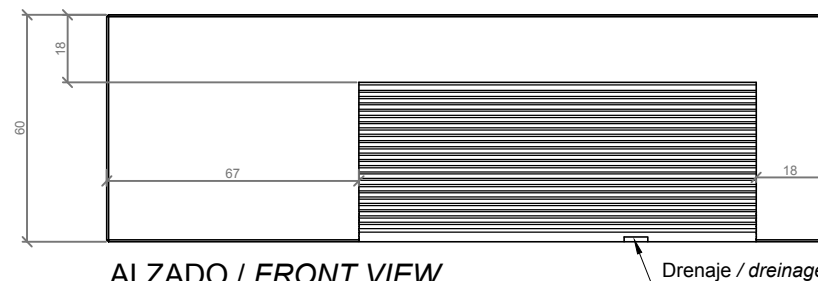

ALZADO / FRONT VIEW

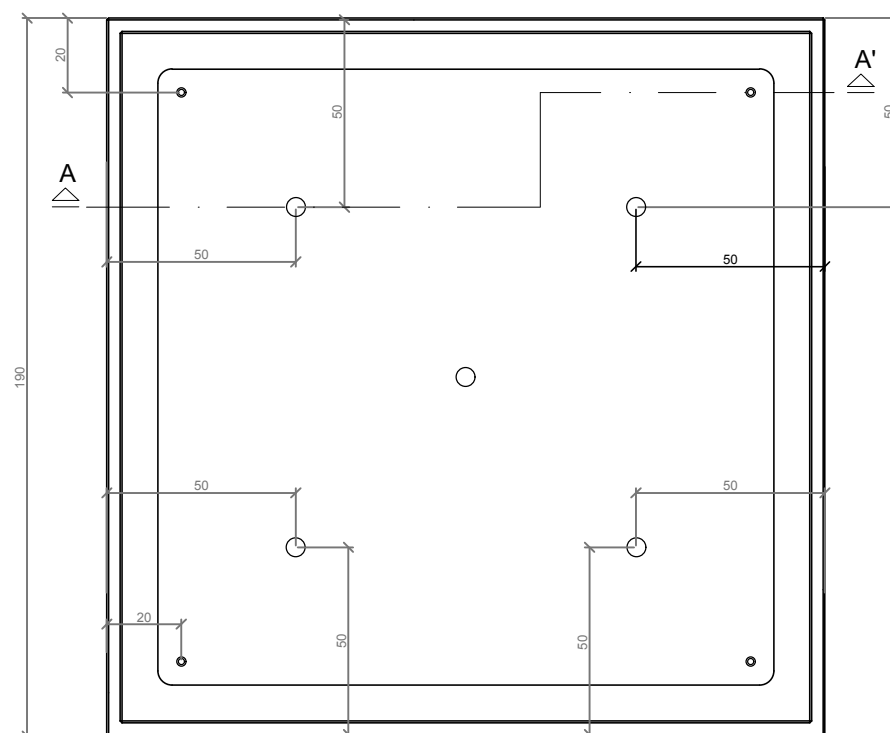


PLANTA / TOP VIEW


ESC. 1:20

MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION

1 Enroskar cáncamo al casquillo roscado
 Thread the eyebolt on the thread sleeve

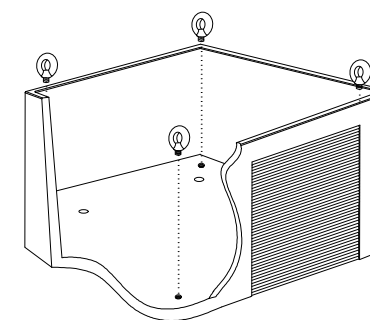


2 Elevar mediante eslingas / lifting with slings

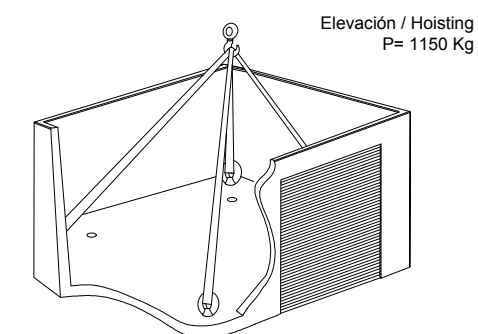


Elevación / Hoisting
 P= 1150 Kg

3 Verter resina epoxy / pour resin epoxy

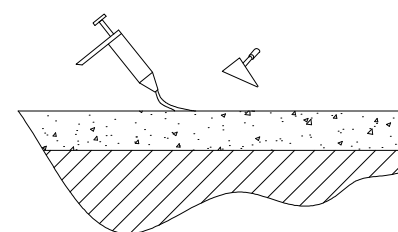


4 Instalar sobre la resina epoxy / Install over resin epoxy

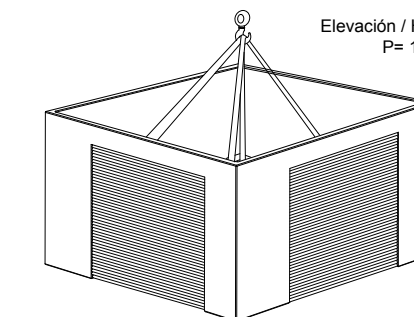


Elevación / Hoisting
 P= 1150 Kg


ESPECIFICACIONES / SPECIFICATIONS




DETALLE N / DETAIL N

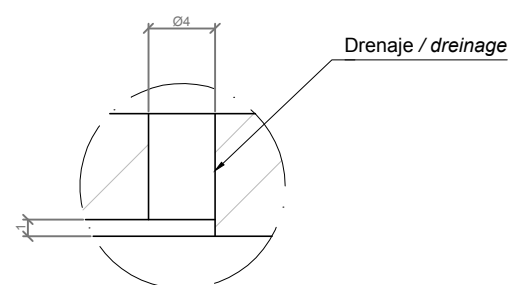

DETALLE M / DETAIL M

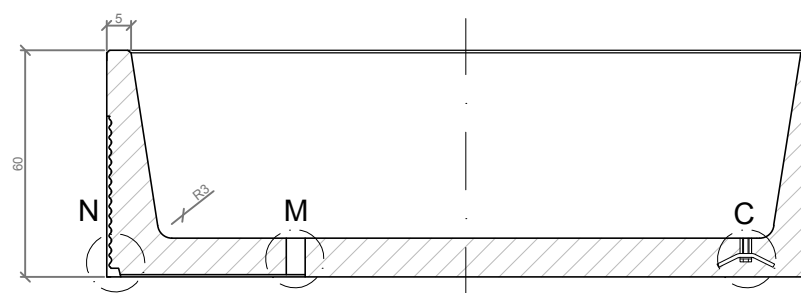

SECCIÓN A-A' / SECTION A-A'

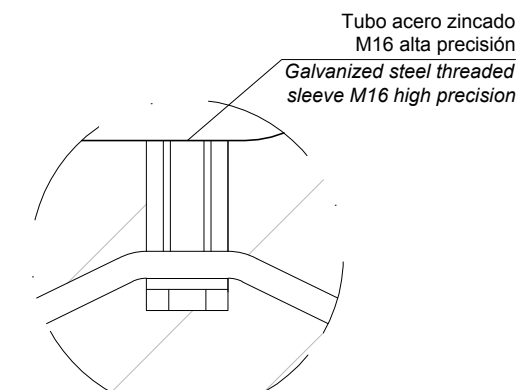

DETALLE C / DETAIL C

Tubo acero zincado
 M16 alta precisión
 Galvanized steel threaded
 sleeve M16 high precision