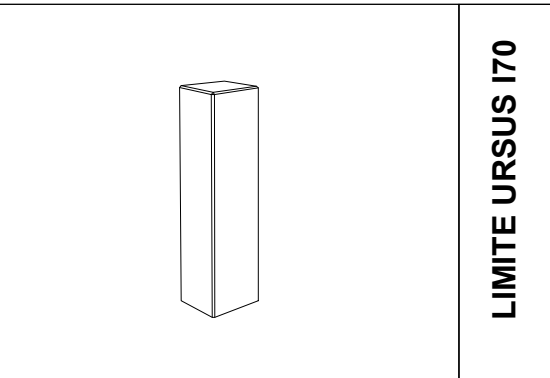
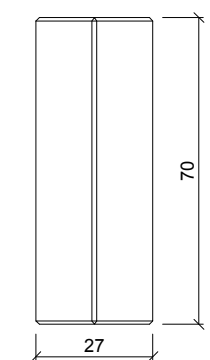
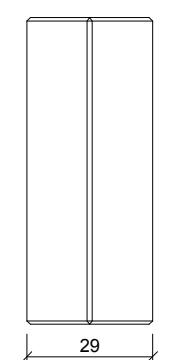



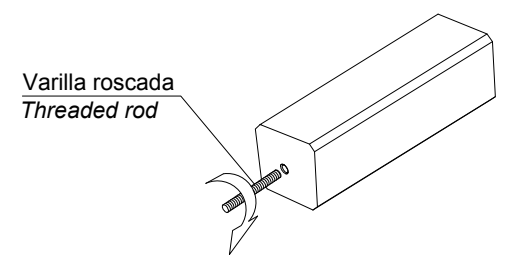

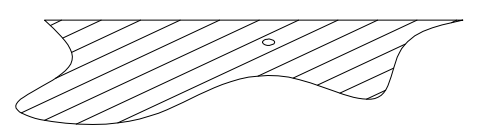

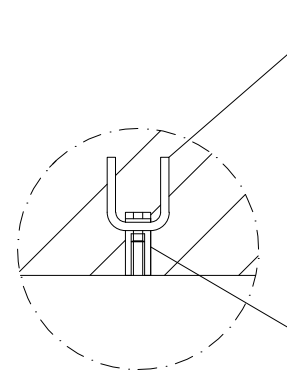


CARACTERISTICAS / FEATURES				 	
Material	hormigón petra 2	Material	precast concrete petra 2		
Acabado	decapado e hidrofugado	Finish	scaled and waterproofed		
Dimensiones	l. 27, a. 29, h. 70 cm.	Dimensions	l. 27, a. 29, h. 70 cm.		
Color	ver carta de colores	Colour	see colour catalogue		
Fijación	simplemente apoyado o mediate varillas metálicas	Fixing	resting on the ground & or anchored with metal rod		
Peso	68 Kg	Weight	68 Kg		
Palet	120 x 100 x 85 cm [20 limites]	Pallet	120 x 100 x 85cm [20 bollards]		
Peso palet	85 Kg	Weight pallet	85 Kg		
dineñador / design: Xavier Brucet					

GEOMETRIA / GEOMETRY		MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION	
 ALZADO  PERFIL  PLANTA  ESCALA EN CM		1 Perforar agujero y verter resina epoxy dentro <i>Drill hole and pour resin epoxy inside hole</i>  2 Posicionar la varilla roscada en el agujero central y apretar <i>Place the threaded rod into the center hole and tighten</i>  3 Insertar varilla roscada en agujero con resina epoxy <i>Insert metal threaded rod in hole with epoxy resin</i>  elevación / hoisting P= 68 Kg 	

ESPECIFICACIONES / SPECIFICATIONS	
 SECTION	Barra corrugada acero negro Ø6 - REA6 <i>Corrugated rod black steel Ø6 - REA6</i>  Casquillo M12 - Tubo acero zincado alta precisión <i>Tube M12 - Galvanized steel pipe high precision</i>

LIMITE URSUS I70

Tàrraga, Lleida. - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com

magourban